

FN

Product name:

Operating limits:

Pressure: 10 Bar

Speed: 15 m/s


Temperature: -30°C... + 200°C



Specifications:

Type	d1	d3	d7	L1	L3
FN 10	10	20	18.1	20.5	5.5
FN 11	11	22	20.6	23.5	5.5
FN 12	12	22	20.6	23.5	5.5
FN 13	13	25	23.1	28	6
FN 14	14	25	23.1	28	6
FN 15	15	29	26.9	30	7
FN 16	16	29	26.9	30	7
FN 17	17	29	26.9	30	7
FN 18	18	33	30.9	32	8
FN 19	19	33	30.9	33	8
FN 20	20	33	30.9	33	8
FN 21	21	38	35.4	33	8
FN 22	22	38	35.4	33	8
FN 23	23	38	35.4	35	8

-  Stationary Ring (Ceramic/SiC/TC)
-  Rotary Ring (Carbon/SiC/TC)
-  Secondary Seal (NBR/EPDM/VITON)
-  Spring and Other Parts (S.S/US304/SUS316)

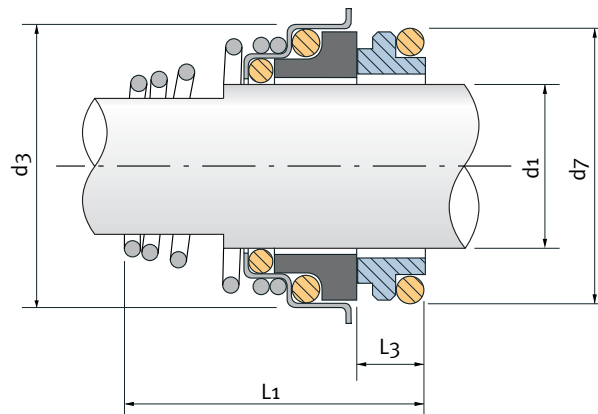

Product name:

FN

Specifications:

Type	d1	d3	d7	L1	L3
FN 24	24	38	35.4	35	8
FN 25	25	40	38.2	35.5	8.5
FN 28	28	46	43.3	39	9
FN 29	29	46	43.3	39	9
FN 30	30	46	43.3	39	9
FN 32	32	46	43.3	39	9
FN 33	33	48	53.5	50.5	11.5
FN 35	35	50	53.5	50.5	11.5
FN 38	38	58	60.5	50.5	11.5
FN 40	40	58	60.5	50.5	11.5