

Product name:

NKG

Operating limits:

Pressure: 12 Bar

Speed: 10 m/s


Temperature: -30°C... + 200°C



Specifications:

Type	d1	d2	d3	d7	L1	L3
NKG 8	8	17.5	19	18.2	14.5	5.6
NKG 10	10	20.5	22.5	19.2	14.5	6.6
NKG 12	12	22.5	25	21.6	15	5.6
NKG 14	14	26.5	28.5	24.6	17	5.6
NKG 15	15	26.5	28.5	24.6	17	6.6
NKG 16	16	26.5	28.5	28	17	7.5
NKG 18	18	29	32	30	19.5	8
NKG 19	19	33	37	35	21.5	7.5
NKG 20	20	33	37	35	21.5	7.5
NKG 22	22	33	37	35	21.5	7.5
NKG 24	24	38	42.5	38	22.5	7.5
NKG 25	25	38	42.5	38	23	7.5
NKG 28	28	44	49	42	26.5	9
NKG 30	30	44	49	45	26.5	10.5
NKG 32	32	46	53.5	48	27.5	10.5

-  Stationary Ring (SIC/TC)
-  Rotary Ring (SS/SIC/TC)
-  Secondary Seal (NBR/EPDM/VITON)
-  Spring and Other parts (SUS304/SUS316)

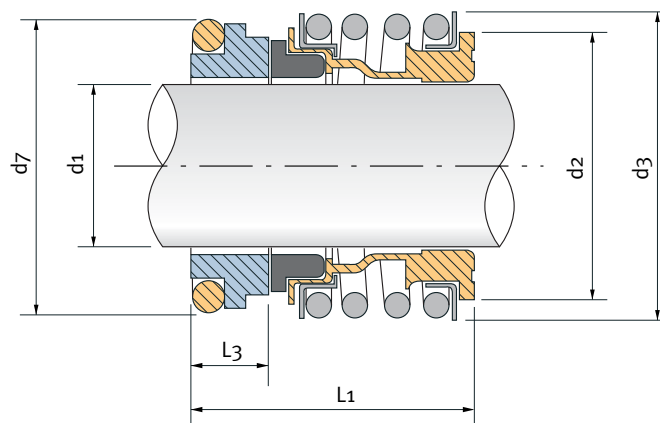

Product name:

NKG

Specifications:

Type	d1	d2	d3	d7	L1	L3
NKG 33	33	46	53.5	50	27.5	11
NKG 35	35	50	57	52	28.5	11
NKG 38	38	53	59	55	30	10.3
NKG 40	40	55	62	58	30	10.8
NKG 42	42	58	65.5	62	30	12
NKG 43	43	58	65.5	62	30	12
NKG 45	45	60	68	64	30	11.6
NKG 48	48	63	70.5	68.4	30.5	11.6
NKG 50	50	65	74	69.3	30.5	11.6
NKG 53	53	70	78.5	72.3	33	12.3
NKG 55	55	72	81	75.4	35	13.3
NKG 58	58	75	85.5	78.4	37	13.3
NKG 60	60	79	85.5	80.4	38	13.3
NKG 65	65	84	93.5	85.4	40	13
NKG 68	68	88	96.5	91.5	40	13.7
NKG 70	70	90	99.5	92	40	13
NKG 75	75	95	107	99	40	14
NKG 80	80	100	112	104	40	15
NKG 85	85	107	120	109	41	14.8
NKG 90	90	114	127	114	45	14.8
NKG 95	95	119	132	120.3	46	15.8
NKG 100	100	124	137	123.3	47	15.8